



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : E21B 47/04</p>	<p>A3</p>	<p>(11) International Publication Number: WO 00/00716</p> <p>(43) International Publication Date: 6 January 2000 (06.01.00)</p>
<p>(21) International Application Number: PCT/NO99/00185</p> <p>(22) International Filing Date: 4 June 1999 (04.06.99)</p> <p>(30) Priority Data: 19982823 18 June 1998 (18.06.98) NO</p> <p>(71) Applicant (for all designated States except US): KONGSBERG OFFSHORE A.S [NO/NO]; Postboks 1012, N-3601 Kongsberg (NO).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): STEN-HALVORSEN, Vidar [NO/NO]; Prokurator Torps gt. 14, N-3600 Kongsberg (NO). STØLEN, Einar [NO/NO]; Bergsbakken 28, N-3600 Kongsberg (NO).</p> <p>(74) Agent: ABC-PATENT, SIVILING. ROLF CHR. B. LARSEN A.S; Brynsvn. 5, N-0667 Oslo (NO).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. In English translation (filed in Norwegian).</p> <p>(88) Date of publication of the international search report: 13 April 2000 (13.04.00)</p>
<p>(54) Title: SYSTEM AND METHOD FOR CONTROLLING FLUID FLOWS IN OIL OR GAS WELLS</p> <div data-bbox="341 1071 1299 1617"> <p>The diagram shows a cross-section of a geological formation with several wells. Each well consists of a production tube (1) and a control unit (2). The control units are connected to the production tubes via valve devices (3). The wells are arranged in a pattern, with some control units (2) located at different depths or positions along the production tubes (1). The diagram is labeled with numbers 1 through 7, indicating various components and their connections.</p> </div> <p>(57) Abstract</p> <p>System and method for controlling fluid flows in one or more oil and/or gas wells in a geological formation, the wells each comprising a production tube, the formation containing a water-containing volume with a higher water level, comprising: one or more measuring devices, each mounted in relation to a chosen zone of a well for measuring the distance to the water level in the zone, one or more valve devices comprised in the production tubes for regulating the fluid flow from the surrounding formation to the production tube, one or more control units connected to each of the valves for regulating then on the basis of the measured distance or distances.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 99/00185

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E21B 47/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4360778 A (R. FREEDMAN), 23 November 1982 (23.11.82) --	1-14
A	US 4361808 A (J.W. KERN ET AL), 30 November 1982 (30.11.82) --	1-14
A	US 4831331 A (B.R. DE ET AL), 16 May 1989 (16.05.89) --	1-14
A	US 5049037 A (G.S. CARSON ET AL), 17 Sept 1991 (17.09.91) -----	1-14

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 December 1999

Date of mailing of the international search report

07 -01- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Christer Bäcknert / MR

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/NO 99/00185


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4360778 A	23/11/82	US 4278941 A	14/07/81
US 4361808 A	30/11/82	AU 542621 B	28/02/85
		AU 554591 B	28/08/86
		AU 3756585 A	16/05/85
		AU 6840681 A	24/09/81
		CA 1148217 A	14/06/83
		GB 2071855 A,B	23/09/81
		MY 91185 A	31/12/85
		NO 810894 A	18/09/81
US 4831331 A	16/05/89	CA 1319953 A	06/07/93
		CA 1324202 A	09/11/93
		FR 2613842 A,B	14/10/88
US 5049037 A	17/09/91	NONE	



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E21B 43/12		A2	(11) International Publication Number: WO 00/00716
			(43) International Publication Date: 6 January 2000 (06.01.00)
(21) International Application Number: PCT/NO99/00185 (22) International Filing Date: 4 June 1999 (04.06.99) (30) Priority Data: 19982823 18 June 1998 (18.06.98) NO (71) Applicant (for all designated States except US): KONGSBERG OFFSHORE A.S [NO/NO]; Postboks 1012, N-3601 Kongsberg (NO). (72) Inventors; and (75) Inventors/Applicants (for US only): STEN-HALVORSEN, Vidar [NO/NO]; Prokurator Torps gt. 14, N-3600 Kongsberg (NO). STØLEN, Einar [NO/NO]; Bergsbakken 28, N-3600 Kongsberg (NO). (74) Agent: ABC-PATENT, SIVILING. ROLF CHR. B. LARSEN A.S; Brynsvn. 5, N-0667 Oslo (NO).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>In English translation (filed in Norwegian). Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: SYSTEM AND METHOD FOR CONTROLLING FLUID FLOW IN ONE OR MORE OIL AND/OR GAS WELLS

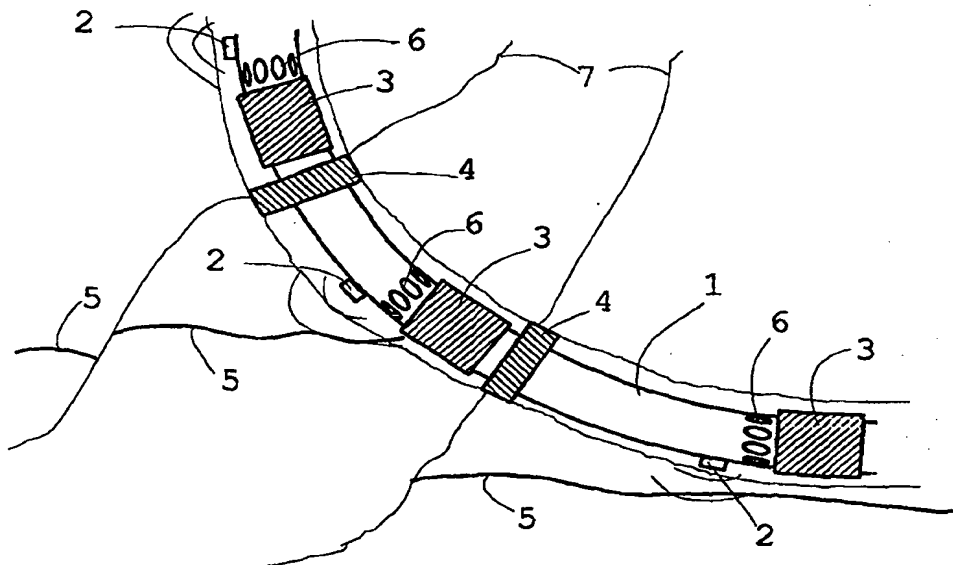

(57) Abstract

System and method for controlling fluid flows in one or more oil and/or gas wells in a geological formation, the wells each comprising a production tube, the formation containing a water-containing volume with a higher water level, comprising: one or more measuring devices, each mounted in relation to a chosen zone of a well for measuring the distance to the water level in the zone, one or more valve devices comprised in the production tubes for regulating the fluid flow from the surrounding formation to the production tube, one or more control units connected to each of the valves for regulating then on the basis of the measured distance or distances.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

SYSTEM AND METHOD FOR CONTROLLING FLUID FLOW IN ONE OR MORE OIL AND/OR GAS WELLS

This invention relates to a system and a method for controlling fluid flows in an oil or gas well in a geological formation, the formation including a water containing area and border surface or water level between the water containing area and a bordering volume of oil or gas.

In oil or gas production it is a reoccurring problem that water enters the well at different positions. The water is transported to the surface together with the hydrocarbons and has to be separated at the surface. This gives extra expenses for the operator also represents a pollution problem, as the separated water has to be cleaned before it is let out into the environment.

When the water content is too large the well is closed and abandoned, even if some zones in the well may still contain oil resources. This becomes a weighting between the costs related to separating and cleaning of the water and the possible income from producing the oil. The typical degree of the exploitation of oil wells today is approximately 35%, and an improvement of only a few percent will therefore give large amounts of money for the oil companies. Thus it is a main object for this invention to obtain an improved emptying/exploitation of the reservoirs.

A number of techniques for rinsing the water at the surface are known. For example, in the US patents 4,187,912 and 4,345,647 the use of separation tanks positioned in the well, in which the oil containing fluid is lead into the tank, and is taken out from the top of the tank. This method will be able separate some water and particles from the oil, but represents a complicated and awkward solution.

US patent 5,049,037 describes a solution in which a movable pump is used to pump the oil up. The pump is kept above the oil/water surface. This also represents a complicated and awkward technique. Also, it will not be suitable for horizontal wells, in which the oil/water surface may be different along the different parts of the well, and in which the water enters the well at different positions, between the oil producing parts of the well.

As mentioned oil and gas wells penetrate several oil bearing and non-oil bearing geological formations, and it is unnecessary and expensive to close the well because significant amounts of water has entered the well in one or more parts. At the same time it is, as mentioned, expensive to separate and thereafter separate the water from the oil after it has been brought to the surface. In larger systems the production tubes from a number of wells are brought together in a manifold in which it is advantageous to detect which wells are producing, or are about to produce, water, so that they may be closed or adjusted individually.

It is an object of this invention to provide a method and a system for reducing the water production while improving the exploitation of a well at the same time as the oil production is maintained. This object is obtained with a system and a method as given above and being characterized according to the independent claims.

This way a possibility is provided for optimizing the oil or gas production in wells passing through several geological formations with varying oil/gas-levels.

The invention is described below with reference to the accompanying drawing, which by way of example illustrate the invention.

- Figure 1 shows a production tube positioned in a well provided with a system according to the invention.
- Figure 2 illustrates a presumed progress of the oil level in the direction of a well.
- Figure 3 illustrates a more realistic progress.
- Figure 4 shows a detail of a horizontal production tube.
- Figure 5 illustrates the control routine for the valves.
- Figure 6 illustrates a system according to the invention comprising two wells.

In figure 1 a production tube 1 is shown penetrating three different formations separated by two border layers 7 hindering or limiting the fluid flow between the formations, which therefore has different oil/water levels 5 between oil, or possibly gas, and water, hereby defined as the water level 5.

Functional details, such as cables for power supply or data transfer, as well as possibly a casing, is of

illustration purposes omitted in figure 1.

In each formation zone a measuring instrument 2 is provided being adapted to measure the distance to the water level 5. This instrument may be of a number of different types, but in a preferred embodiment of the invention an electromagnetic transmitter and receiver is used. As the water in the formation usually is contaminated with salt etc. it will, in contrast to the case with the surrounding formation containing oil and/or gas, be electrically conductive. Thus an emitted electromagnetic pulse will be reflected by the water level 5. By e.g. measuring the time lapse for the reflected pulse the distance to the water level may be measured.

Preferably, however, the measuring technique is based on continuous emission of a coherent electromagnetic wave, and analysis of the variation in the resulting standing wave between the water level and the transmitter when the water level moves. Use of a plurality of frequencies may provide the distance to the water level.

The measuring device 2 is preferably positioned directly in contact with the geological formation. If the well comprises a casing 8 (see figure 2) the measuring instrument is positioned in a hole in the casing 8, or possibly outside it, so that it does not influence or suppress the signals.

Preferably the measuring instrument is adapted to measure the direction of the reflected signal, so that the direction of the water level's movement may be measured. If the measuring instrument is based on the emission of electromagnetic waves in the radio frequency range this may be obtained simply by using direction sensitive antennas.

As mentioned above other per se known techniques for measuring the distance to the water level may be used, e.g. acoustic measurements, use of neutron radiation, magnetic measuring techniques or simply direct contact with the water, without being essential to the present invention.

When the water level 5 comes within a certain distance from the tube one or more valves 3,6 are provided related to each geological zone. In the figure the valves 3,6 consists of a shiftable cylindrical sleeve which completely or partially may cover a number of openings in the production

tube 1. The control mechanisms for the sleeve is of illustration purposes not shown, but may essentially be made from known parts for controlling sliding sleeves.

Different other types of valves may also be used, preferably of a type being controllable from the surface or from equipment positioned in the well.

Placed by the transition layers 7 between the formations the figure shows packing 4 hindering the fluids from flowing along the well outside the production tube 1. The packers may be standard packers for use in oil or gas wells.

When the water level 5 in a zone gets closer to the valve in the zone the valve may be closed so as to avoid water entering the production tube 1. Thus the production in the other areas in the well may be continued unaffected. In one especially preferred embodiment of the invention the distance to the water level is measured repeatedly and the velocity is calculated to predict when the water will enter the related valve. By partially closing the valve the velocity may be reduced, and by individually controlling each of the valves the production in the different areas of the well may be regulated so that the water level 5 reaches the separate valves 3,6 at the same time. Thus an optimal production of the well is provided without entering of water.

In figure 1 the production tube is shown in an area having a curved transition from a vertical to a horizontal progress. The invention is, however, especially suitable in long, horizontal wells in which the water level may be different in different formations. Typically the geological formations will be larger than what is illustrated in the drawing. In such instances a plurality of valves/measuring instrument arrangements in each formation may be preferable, as is shown in figure 2. In figure 2 the water level 5 varies along the horizontal well, which because of anisotropies such as varying density in the oil bearing medium, or directional flow, e.g. because of directional cracks in the medium.

In figure 2 the well is limited in several zones in the same geological formation using packers 4, so that the

production from the geological formation may be optimized in the same way as described above. This solution may be especially favourable if the well follows a chosen oil bearing formation. This type of formations may deviate from a horizontal progress and will also typically have anisotropic flow characteristics for fluid.

The optimal in the situation shown in figure 2 is thus that the valves are adjusted so that the water level is parallel with the well, the distance to the water level thus being at its maximum along the whole well.

Calculations of the movements of the water level is based on the assumption that the movement is linear, as indicated with the line 9 in figure 3, in which A is the distance from the well to the oil/water border surface, and t is the time. This assumption is, however, seldom correct, but will depend on a number of conditions in the surrounding formation. In figure 4 a situation is shown in which the distance decreases rapidly, which means an increasing velocity toward the well, as shown in the curve 10. On this basis the present zone of the well will produce water at an earlier time than supposed by the linear calculations, as indicated by the curves 11 and 12 in figure 4. This progress may be significantly more complex, with a possibility for an increase in the distance to the water level, and thus it is preferable to perform repeated or continuous measurements of the distance, and more advanced calculation methods for predicting the time the water level reaches the well based on these measurements, e.g. using interpolation based on the measured distances, correlation analysis of the movements at the different measuring instruments or other calculation methods.

The prediction of the closing time at the individual valves may preferably be done on the basis of measured data from all the measured locations along the production pipe. By combining these a picture is provided of the water levels movements and the flow conditions in the surrounding geological formation.

In addition to the calculations of distances and movements of the water level the retrieved information may be used for other types of calculations. For example the

movements of the water level may provide indications of the size of the oil resource in the related part of the formation, as well as permeability and other characteristics of the formation based on other known parameters of the well.

Figure 5 shows schematically a possible decision procedure for controlling each of the valves. The procedure comprises the following steps:

- 21 Starting the system
- 10 22 measuring 22 the distance to the water contact.
- 23 The distance is compared with a chosen limit value. If the distance is not less than the limit value the measurement 22 is performed again.
- 24 If the distance is less than the limit value an alarm
15 is sent to the operator.
- 25 The operator decides if the corresponding valve should be adjusted. If the decision is negative the procedure is repeated from step 22.
- 26 The valve is adjusted and the procedure is repeated
20 from step 22. When the corresponding valve is closed the procedure may be stopped, or the monitoring of the distance may continue in case the water level retreats, e.g. because of the flow characteristics of the formation.
- 25 Typically the steps 22 and 23 are performed a number of times, so that the movements of the water level and the rate of change may be monitored.

Using complex calculation methods, in which the velocity and the rate of change in the velocity, the control
30 procedure may be different. The role of the operator in the example above may also be performed by an automatic procedure based on the abovementioned calculations.

In figure 6 a more complex system comprising a number of wells 13 is shown, each following a separate oil-
35 producing layer 14. The production tubes in the different wells are connected to a manifold 15 of any suitable type, and which comprises one or more well head Christmas trees, power supplies and possible calculation units controlling the separate valves based on the retrieved information.

40 From the manifold 15 a riser 16 of a known type leads the

oil/gas up to a vessel or a platform 18 on the surface 17.

In a special embodiment of the invention the valves for controlling the fluid flow may be positioned in the manifold, and not in the production tube. This way the
5 water production from the separate wells may be controlled, and thus hinder the water from entering the system as a whole. In such a system the measuring instruments may be positioned in the separate wells 13.

Circuits for performing the calculations and control
10 functions may be positioned at different parts of the system without being of any significance to the idea of the invention, but will depend on the required calculating power, data transfer capacity and other characteristics of the system. Devices for power supply, power and signal
15 transmission etc. may be of any available type, and is not essential to this invention.

Even if the invention mainly has been described relating to the purpose of avoiding water in the produced oil allowing a certain degree of water to enter may be
20 favourable to optimize the production. The different valves may then be adjusted so as to obtain this production, depending on the local conditions in that particular situation.

The invention is here mainly described in relation to
25 oil production, but it is evident to a person known in the art that it also may be implemented in relation to gas production.

C l a i m s

1. System for controlling fluid flows in one or more oil and/or gas wells in a geological formation, the wells each comprising a production tube, the formation containing a water-containing volume with a higher water level,

c h a r a c t e r i z e d in that it comprises:

- one or more measuring devices, each mounted in relation to a chosen zone of a well for measuring the distance to the water level in the zone,
- one or more valve devices comprised in the production tubes for regulating the fluid flow from the surrounding formation to the production tube,
- one or more control units connected to each of the valves for regulating them on the basis of the measured distance or distances.

2. System according to claim 1,

c h a r a c t e r i z e d in that at one or more valves are mounted by each measuring device for locally controlling the fluid flow from the formation into the production tube.

3. System according to claim 1,

c h a r a c t e r i z e d in that the measuring devices comprises an electromagnetic transmitter and a receiver adapted to measure the distance between the measuring device and an electrically conducting medium.

4. System according to claim 3,

c h a r a c t e r i z e d in that said electromagnetic transmitter comprises a pulse generator, and that said measuring device is adapted to measure the time lapse from the emission of a pulse to the receipt of a reflection of said pulse by said receiver.

5. System according to claim 3,

c h a r a c t e r i z e d in that said electromagnetic transmitter emits a continuous, essentially coherent, electromagnetic wave.

6. System according to any one of the preceding claims, characterized in that the well comprises a production tube, said tube being perforated in each zone in at least parts of its length, and that said valves are mounted on the outside of said production tube.

7. System according to claim 6, characterized in that the valves comprises per se known, axially shiftable cylindrical sliding sleeves enveloping the tube and that said control units are adapted to move said sliding sleeves axially for covering/uncovering at least parts of the tube perforations.

8. Method for controlling fluid flows in one or more oil and/or gas wells in geological formations, the wells comprising a least one production tube, in which the formation includes a water-containing area with an upper water level,

characterized in comprising the following steps:

- measuring the distance from one or more zones in the well to the water level in the corresponding part of the surrounding geological formation,
- controlling one or more valves related to the production tubes based on the measured distances for adjusting the fluid flow from the formation into the production tubing.

9. Method according to claim 8,

characterized in that the distances are measured at one or more chosen zones in production tubes for regulating the fluid flow from the formation to the corresponding zone in the production tube.

10. Method according to claims 8 or 9,

characterized in that the distance between the measuring devices and said water level is measured at chosen intervals, and that variations in the distances are used to predict the closing time for the corresponding zone in the well.



11. Method according to one of claims 8-10, characterized in that the well comprises a production tube being perforated at one or more zones and which comprises, at their outer side, a number of cylindrical, axially shiftable sliding sleeves, and that the valves are closed by moving the sliding sleeves over the perforations in the casing.

12. Method according to one of claims 8-11, characterized in that the separate distances are measured by emission and receipt of electromagnetic waves.

13. Method according to claim 12, characterized in that the electromagnetic waves are emitted as pulses, and that the distance is measured as a function of the time lapse from the emission to the receipt of the reflected pulses, and the propagation velocity through the medium.

14. Method according claim 12, characterized in that the electromagnetic waves are emitted as continuous, essentially coherent waves at one or more frequencies.

1/3

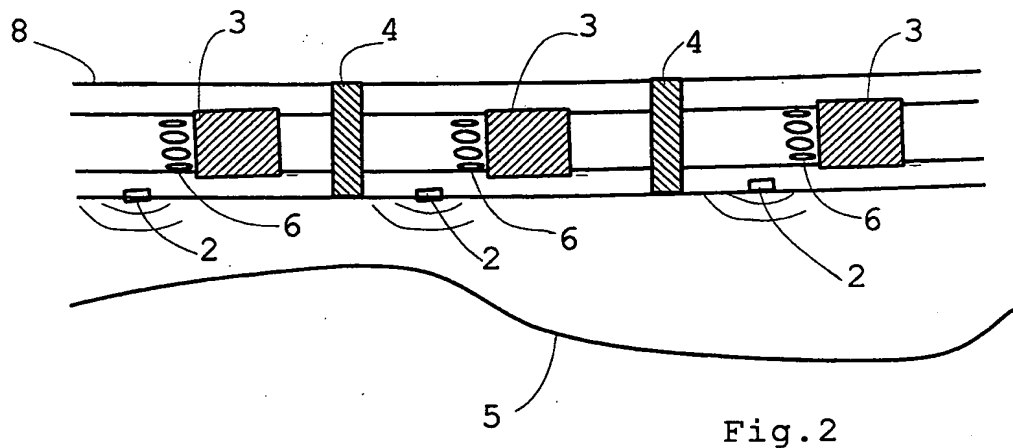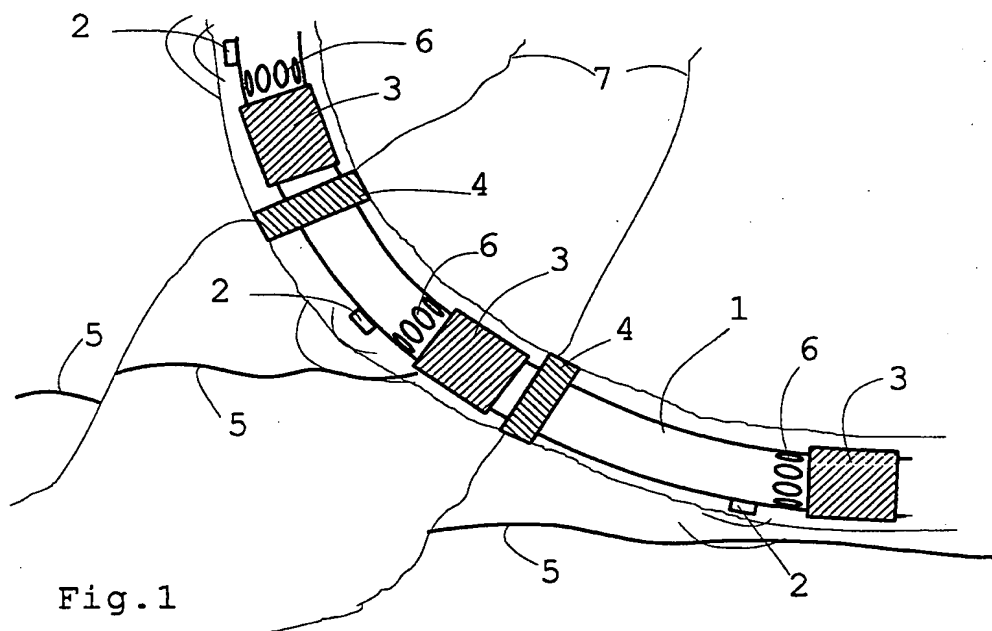

BEST AVAILABLE COPY

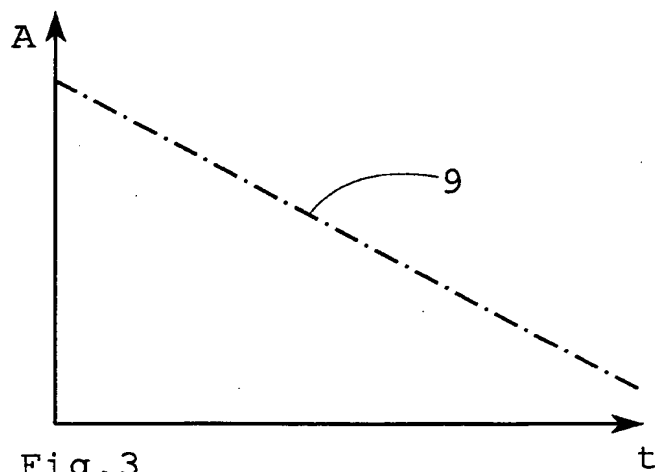


Fig.3

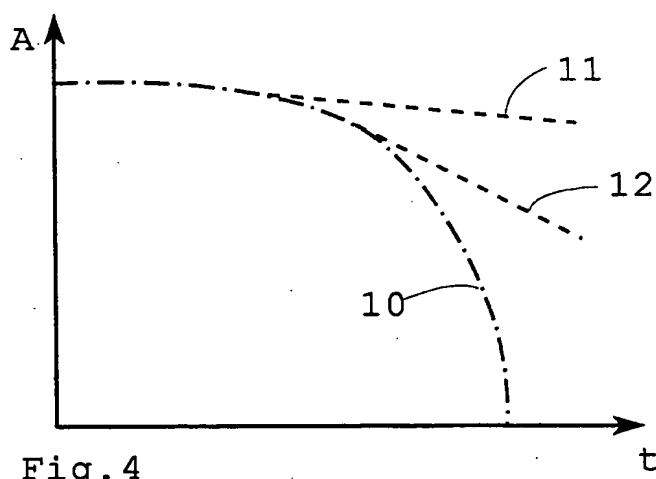


Fig.4

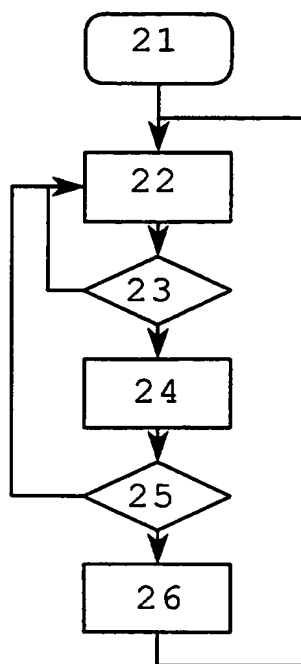


Fig.5

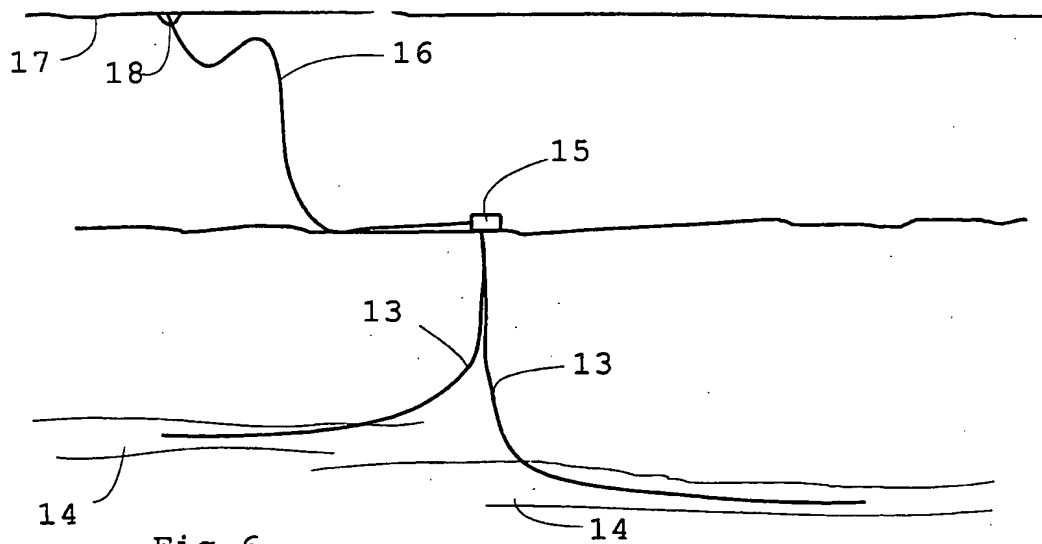


Fig.6